

E-series

Articulated Dump Trucks

B25E | B30E MK2



Tier 4f/Stage IV Certified

BELL

E is for evolution

Your business is our business. Bell Articulated Dump Trucks haul more, for longer at the lowest cost-per-ton to deliver more on your profit margins.

As a global leader in Articulated Dump Trucks, Bell Equipment brings you the world class E-series range. The evolutionary E-series is packed with class leading features that deliver production boosting payloads, lower daily operating costs, superior ride quality and uncompromised safety standards. Bell E-series ADTs will give your business the competitive edge you need.



- Extensive use of high-strength, lightweight materials give these trucks the best payload-to-mass ratios and hauling efficiencies in each class.

- With their oscillating frame and high-floatation tires, Bell trucks won't leave you stuck on muddy, rutted or hilly terrain.

- The redesigned sound-suppressed cab features fatigue-beating controls, advanced diagnostic monitor and a sealed-switch module for convenient, fingertip operation of numerous functions.

- Fuel-efficient emission-certified engines deliver clean power without compromise in all conditions. Leading-edge emissions technology ensures rapid engine response and dependable cold-start performance.


| Specifications | B25E | B30E |
|----------------------------|---|---|
| Gross power | 210 kW (281 hp) | 246 kW (329 hp) |
| Operating mass | | |
| Empty | 19,660 kg (43,343 lb) | 20,140 kg (44,401 lb) |
| Loaded | 43,660 kg (96,253 lb) | 48,140 kg (106,131 lb) |
| Rated payload | 24,000 kg (52,911 lb) | 28,000 kg (61,729 lb) |
| 2:1 heaped capacity | 15 m ³ (19.5 yd ³) | 17.5 m ³ (22.9 yd ³) |

The new E-series range takes ADT functionality to new industry standards, with customer-focused enhancements and the highest level of automated machine protection available.

Through substantial investments in Research and Development and employing industry leading technology, advancements have been made in the key areas of performance and fuel efficiency – helping you to move more material at lower operating costs and environmental impact.

Building on pedigree

Building on from the D-series platform, Bell Equipment's evolutionary approach to design delivers optimized power-to-weight ratio and legendary fuel efficiency.

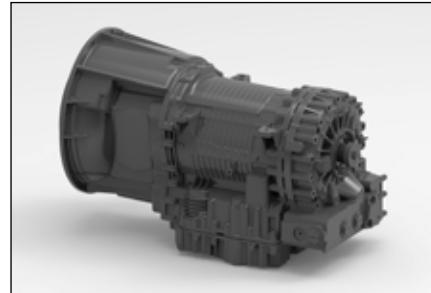

Planetary powershift transmission optimizes shift points to match conditions and vehicle weight while protecting the transmission from operator error and abuse.



The transfer case inter-axle differential delivers equal torque to each axle when traction is favorable. When conditions deteriorate, the diff-lock automatically engages to deliver torque to the tires that can best use it.



High-strength steel and widely spaced taper roller bearings in the articulation area enhance long-term durability.



A tailgate is available as an option for better material retention. The tailgate opens as the bin is raised for dumping. Spring steel straps maintain positive seal throughout the haul, ensuring minimal material is lost.

- Limited-slip differentials and electronically controlled automatic Inter-axle Differential Lock (IDL) provide Automatic Traction Control (ATC) in poor underfoot conditions.

- The best-in-class payload-to-weight ratio means that more of your fuel cost is spent moving the material, not running the machine, decreasing your cost per ton.

- An industry leading, fully automatic six-speed planetary transmission with torque converter lock-up maximizes fuel efficiency.

- Automatic retardation slows the truck when the operator backs off the accelerator pedal for more confidence on steep grades and enhanced brake life.



- Improved payloads, faster haul cycles and industry leading fuel economy all help you move more material at a lower-cost-per-ton than your competitors.

- Class leading payload-to-weight ratio means that more of your fuel cost is spent moving the material and not running the machine - for maximum productivity and profitability.

- With a high oscillating frame joint, articulated steering, and high-floatation tires, these hard working haulers won't let wet weather or steep grades dampen your plans.

Our innovative front and rear comfort ride suspension options are offered to even further enhance ride quality and ensure minimal whole body vibration exposure.

Productivity increases through reduced cycle times, and reduced haul road maintenance are even further benefits of these extremely successful systems. Experienced ADT operators who have driven trucks installed with these systems have come away amazed by the comfort of the machine, as well as the confidence that the adaptive front suspension engenders.

Uncompromised durability

Built smarter, to work harder. Bell ADTs offer optimized machine weights so you spend more time and money moving material and not running the machine.

With decades of ADT experience, the new Bell E-series articulated hauler is designed and manufactured using purpose built, reliable Bell components best suited for the toughest of conditions. The central oscillation joint, high suspension travel on all axles, and balanced weight distribution provide the agility and ability to navigate hostile terrain.



The high-strength steel chassis delivers strength and rigidity without excess weight.



- Dual circuit hydraulically actuated dry-disc brakes on the B25E deliver consistent “on-the-mark” braking, even in cold weather. Simplified design makes them easy to maintain.

- Fully enclosed, dual circuit wet disc brakes on the B30E offer superior braking performance and extended service life essential for wet and muddy conditions. Oil-immersed wet-disc brakes are virtually maintenance-free.

- Viscous electronically controlled direct-drive engine fans provide cooling for the best efficiency.

- Class leading engine braking coupled with automated transmission retardation, provides superior braking power and reduces service brake wear.



For comfortable productivity, the A-frame suspension system coupled with hydropneumatic suspension struts reduce the lateral vibration often experienced with off-road conditions. A superior suspension seat provides additional isolation for the operator.



Rough terrain demands tough suspensions. Heavy-duty components absorb shocks and come back for more. You get best-in-class suspension travel and ground clearance, too.

Other uptime-boosting features include world class on-board diagnostics with live stream functionality, solid-state sealed switches and satellite fleet management system.

High-strength welded-alloy steel chassis and reinforced articulation joints, offer superior strength and durability with optimized weight for class leading power-to-weight ratio. Lower machine mass reduces powertrain and structural stress.

Run leaner and cleaner

A combination of an optimally tuned engine and weight optimized complete machine package ensure that Bell ADTs have a minimal carbon footprint.

SCR uses AdBlue®/DEF which

- is non-toxic, odorless, low cost and simple to refill.
- is injected into the flow of the exhaust gases and reacts with the NOx gases in the catalytic converter to form harmless nitrogen and water.
- is consumed at approximately 3-5% of your fuel usage.

EGR

- recirculates burnt exhaust gas back into the combustion chamber, lowering combustion temperatures and NOx production.
- on the Mercedes Benz engine, does not require a diesel particulate filter (DPF) and associated regeneration.



- Reduced emissions
- Improved engine efficiency
- Lower fuel consumption



- Stage IV/Tier 4f emissions control coupled with the lowest fuel burn ensures the lowest environmental impact.

- Our new engine platform from Mercedes Benz gives lower specific fuel consumption than the outgoing Stage IIIB/Tier 4i engine.

Our E-series truck platform easily accommodates the new engine and related emissions control technology and reflects our strategy of continuous improvement.

Bell Equipment's evolutionary E-series runs SCR-technology (Selective Catalytic Reduction) in combination with EGR to give an industry leading standard in fuel-efficient emission control, designed specifically for the off-highway market to be compliant to Stage IV and Tier 4f. Engine power and fuel consumption have been further optimized through event dependant software that controls retardation, cooling and charging of accumulators.

Operate with ease

Using the latest in automotive technology and state-of-the-art tooling, the E-series takes operator experience to new heights.

Climb into the cab of a Bell ADT and you will feel right at home. Its quiet, spacious interior, ergonomically positioned operator station and climate-controlled cabin is loaded with productivity boosting comfort and convenience features that minimize operator fatigue and enhance the operator's experience. Modern flowing lines, in keeping with current styling trends on road vehicles, offer unsurpassed levels of visibility.

From the state-of-the-art 10" full color screen, automotive mouse interface and sealed switch module with centrally located sealed display unit to air suspension seat, tilt/telescoping steering wheel and optional CD player with high-output speakers, the E-series provides everything your operators need to perform at their best.



Easy-to-understand instruments and intuitive controls wrap around the operator so they're easier to view and operate.



A user friendly 10" color monitor offers vital operating information, safety warnings, detailed diagnostic readings and dump body function settings.



An automotive controller provides menu navigation on the color monitor to extract information on machine operation and adjustment of machine settings.



Convenient sealed switch module provides fingertip control of numerous productivity enhancing functions including: **Keyless Start, I-Tip, Dump Body Upper Limit, Soft Stop/Hard Stop Selection, Retarder Aggressiveness and Speed Control.**

• The standard sound-suppression package significantly reduces noise levels and operator fatigue.

• The adaptive transmission control adjusts clutch engagement to ensure smooth, consistent shifts throughout the life of the truck.

• A fully adjustable air-suspension seat with variable damping, auto height adjust according to operator weight, pneumatic lumbar support and multipoint harness for class-leading comfort and safety.

• A purpose designed HVAC climate-control system with automotive-style louvers keeps the glass clear and the cab comfortable.

• New machine styling and cabin design improvements, which include full glass access door and high visibility mirror package, provide exceptional all-round visibility.

• You won't find retarder pedals or levers in a Bell truck. Retarder aggressiveness is simply set on the switch pad. Everything else is automatic.

Safety, our business too

By listening to users and delivering on expectations in an ever changing workplace, we provide a truck that leads in application safety with numerous groundbreaking innovations.

Independent features such as Keyless Start, Hill Assist, Bin Tip Prevention, Auto Park Application (APA), Standard Turbo Spin Protection and On-Board Weighing (OBW) are still standard on the E-series. For improved safety and productivity, the E-series has an electronically controlled automatic Inter-axle Differential Lock (IDL) giving the vehicle full Automatic Traction Control (ATC).



Our quiet operator cabins are ROPS/FOPS certified with an air suspension operator seat. The trainer seat has a retractable lap belt while the operator seat has a standard 3 point seat belt. Both have automatically locking retractor.



An optional integrated reverse camera and high visibility mirrors ensure superior all round visibility.

Keyless start, driver identity and access codes ensure no unauthorized operation of your equipment.



The exclusive on-board weighing presents the operator with real time information on the payload while the machine is being loaded. A 'speed restriction' mode can also be activated if the machine is significantly overloaded.



The incorporation of a pitch and roll sensor in the vehicle prevents bin operation if the truck is in an unsafe position.



Both operator or site selectable maximum speed control allows the vehicle to automatically decelerate and apply the retarder to prevent onsite speeding.

- Full handrails (to ISO 2876) can be installed to offer improved safety when performing engine checks.
- The park brake automatically applies when neutral is selected and it is not possible to engage neutral at speed. Torque dependent park brake release (Hill Assist) ensures no roll back on slopes.
- Best-in-class retarder and engine braking automatically applies when the operator lifts his foot off the accelerator. Retarder aggressiveness can be simply adjusted on the sealed switch module ensuring maximum descent control for all conditions.
- All trucks can be set up to automatically sound the horn when starting or switching between forward and reverse.
- Multiple geofencing in challenging site conditions ensures safe machine operation, such as downhill speed control, geofence speed limits and bin restrictions.

Maximize your uptime

The E-series is loaded with features that make it as easy to maintain as it is to operate. Spend less time and expense getting ready for work and more time getting work done.

Easy-to-reach dipsticks, see-through reservoirs, sight gauges and grouped service points make quick work of the daily routine. Quick-change filters, extended engine and hydraulic oil-service intervals lower daily operating costs and provide superior machine uptime. An industry leading 10" color monitor offers on-board machine diagnostics as well as automated daily service functionality, this coupled with diagnostic test ports help you troubleshoot and make informed maintenance decisions on site.



If something goes wrong, the diagnostic monitor provides service codes and supporting info to help diagnose the problem.



The cab can be tilted in minutes without special tools, for convenient service access to drivetrain components.



An in-cab load center simplifies fuse replacement. Fewer relays, connectors and harnesses mean higher reliability.



We offer a remote transmission filter option. They make transmission filter replacement a fast and clean task.



See-through fluid reservoirs and sight gauges let you check fluid levels at a glance.



Easily accessible test ports allow technicians to troubleshoot problems more quickly.




The centralized lube bank places difficult-to-reach grease points within reach.



The convenient and easy to understand RSG decal details daily checks and actions (eg: greasing).

Where ever you are...

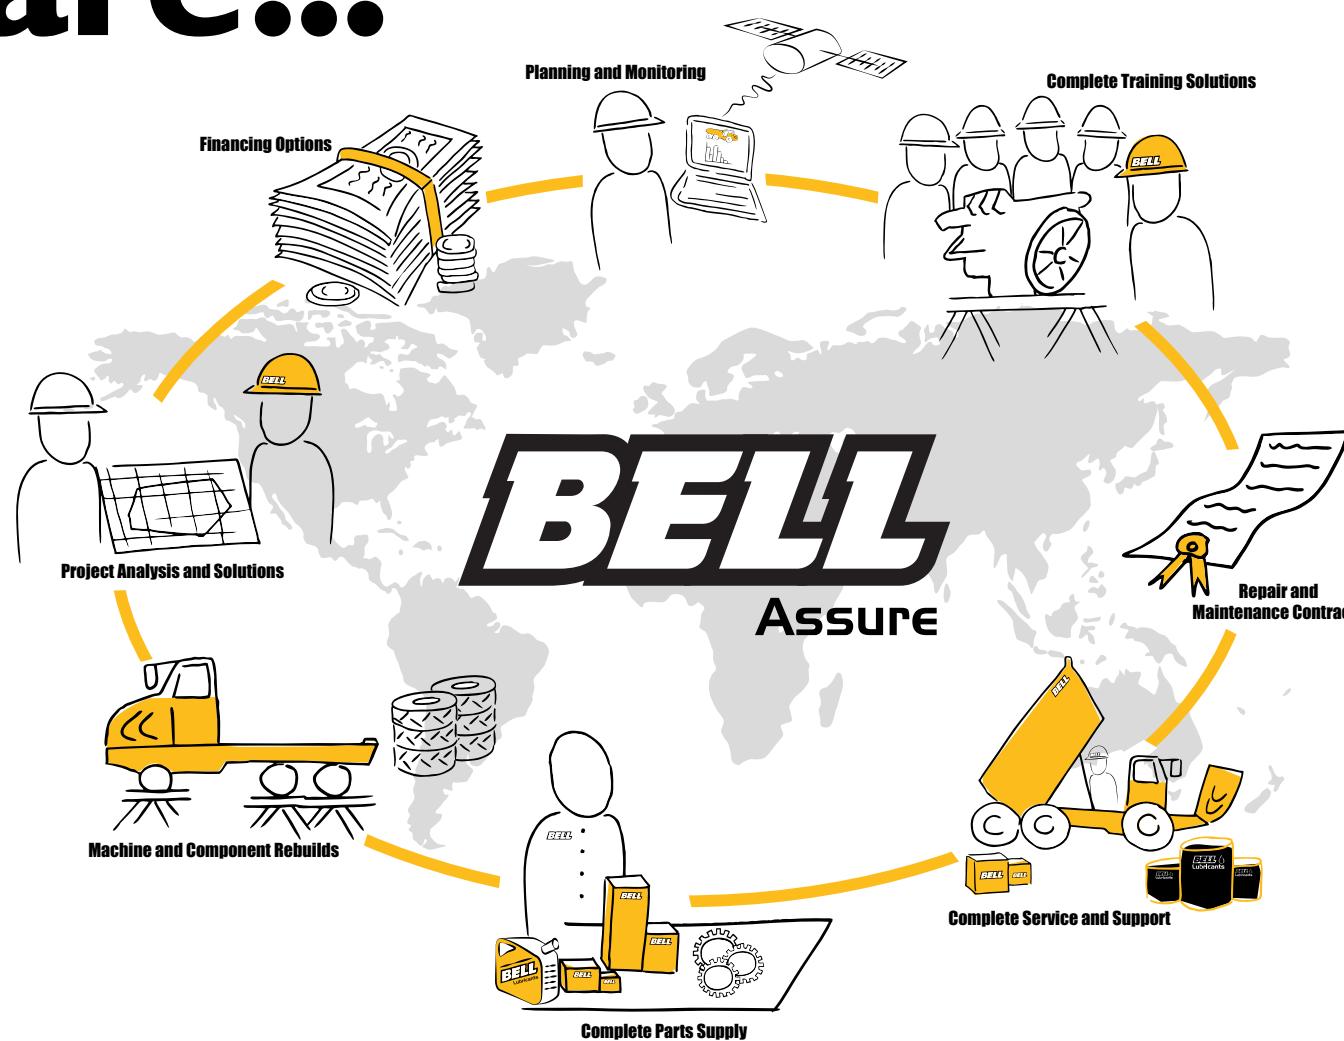

Through our own network as well as approved dealers and strategic alliances we ensure supply and support to the global market.

Develop a lasting and meaningful partnership with Bell Equipment through Bell Assure, your tailor-made support structure furnished with all the after-sales tools you need to give you best value, peace of mind and a unique after-sales experience.

...we have you covered

Smarter fleet management



Cutting edge technology, helping you run your fleet smarter. Providing accurate, up-to-date operational data, production data and diagnostic data.

The key to a productive and profitable fleet, lies in the ability to monitor and manage your machines and operators efficiently. Machine operational data is processed and compiled into useful production and performance statistics, accessible via the Bell Fleetm@tic® website. These reports are also automated and emailed directly to you. The two monitoring packages that we have available, are:

- The **Classic Package** supplies you with good enough information for you to have a very good understanding of how your machines is operating for each shift that it runs. This package comes standard with the machine for 2 years.
- The **Premium Package** is focused on customers who need to have extremely detailed information of the machine's operation. For this package we offer similar information to that of the Classic Package but for each individual laden - unladen cycle. In addition, live tracking is available on the Fleetm@tic® website on a per minute basis.

Fleetm@tic®:

- Maximize productivity
- Generate machine utilization reports
- Identify operator training requirements
- Pro-active maintenance planning
- Receive machine health data
- Implement safety features
- Protect investments
- Receive real time geospatial data



Technical Data - B25E

ENGINE

Manufacturer
Mercedes Benz

Model
OM936LA

Configuration
Inline 6, turbocharged and intercooled.

Gross Power
210 kW (281 hp) @ 2,200 rpm

Net Power
201 kW (269 hp) @ 2,200 rpm

Gross Torque
1,150 Nm (848 lbft) @ 1,200 - 1,600 rpm

Displacement
7.7 liters (469 cu.in)

Auxiliary Brake
Engine Valve Brake

Fuel Tank Capacity
302 liters (79.78 US gal)

AdBlue® Tank Capacity
31 l (8.2 US gal)

Certification
OM936LA meets EU Stage IV / EPA Tier 4 Final emissions regulations.

TRANSMISSION

Manufacturer
Allison

Model
3500PR ORS

Configuration
Fully automatic planetary transmission with integral retarder.

Layout
Engine mounted

Gear Layout
Constant meshing planetary gears, clutch operated

Gears
6 Forward, 1 Reverse

Clutch Type
Hydraulically operated multi-disc

Control Type
Electronic

Torque Control
Hydrodynamic with lock-up in all gears.

TRANSFER CASE

Manufacturer
Bell VGR

Model
8100

Layout
Remote mounted

Gear Layout
Three in-line helical gears

Output Differential
Interaxle 33/67 proportional differential. Automatic inter-axle differential lock.

AXLES

Manufacturer
Bell

Model
15T

Differential
High input limited slip differential with spiral bevel gears

FINAL DRIVE

Outboard heavy duty planetary on all axles.

BRAKING SYSTEM

Service Brake
Dual circuit, full hydraulic actuation dry disc brakes with 8 calipers (4F, 2M, 2R).

Maximum brake force:
184 kN (41,400 lbf)

Park & Emergency
Spring applied, air released driveline mounted disc.

Maximum brake force:
195 kN (43,900 lbf)

AUXILIARY BRAKE

Automatic engine valve brake. Automatic, adjustable, integral, hydrodynamic transmission retarder. Output shaft speed dependent.

TOTAL RETARDATION POWER

Continuous: 318 kW (426 hp)

Maximum: 588 kW (788 hp)

WHEELS

Type
Radial Earthmover

Tire
23.5 R 25

FRONT SUSPENSION

Semi-independent, leading A-frame supported by hydro-pneumatic suspension struts.

REAR SUSPENSION

Pivoting walking beams with laminated rubber suspension blocks.

HYDRAULIC SYSTEM

Full load sensing system serving the prioritized steering, body tipping and brake functions. A ground-driven, load sensing emergency steering pump is integrated into the main system.

PUMP TYPE

Variable displacement load sensing piston

FLOW

165 l/min (44 gal/min)

PRESSURE

28 MPa (4,061 psi)

FILTER

5 microns

STEERING SYSTEM

Double acting cylinders, with ground-driven emergency steering pump.

LOCK TO LOCK TURNS

4.1

STEERING ANGLE

45°

DUMPING SYSTEM

Two double-acting, single stage, dump cylinders.

RAISE TIME

14.5 s

LOWERING TIME

7.5 s

TIPPING ANGLE

70° standard, or any lower angle programmable

PNEUMATIC SYSTEM

Air drier with heater and integral unloader valve, serving park brake and auxiliary functions.

SYSTEM PRESSURE

810 kPa (117 psi)

ELECTRICAL SYSTEM

Voltage

24 V

BATTERY TYPE

Two AGM (Absorption Glass Mat) type.

BATTERY CAPACITY

2 X 75 Ah

ALTERNATOR RATING

28V 80A

VEHICLE SPEEDS

| | | |
|-----|---------|--------|
| 1st | 7 km/h | 4 mph |
| 2nd | 15 km/h | 9 mph |
| 3rd | 23 km/h | 14 mph |
| 4th | 35 km/h | 22 mph |
| 5th | 47 km/h | 29 mph |
| 6th | 50 km/h | 31 mph |
| R | 7 km/h | 4 mph |


GRADEABILITY

| | |
|----------|------------------------|
| Flow | 165 l/min (44 gal/min) |
| Pressure | 28 MPa (4,061 psi) |
| Filter | 5 microns |

CAB

ROPS/FOPS certified 74 dBA internal sound level measured according to ISO 6396.

Dimensions

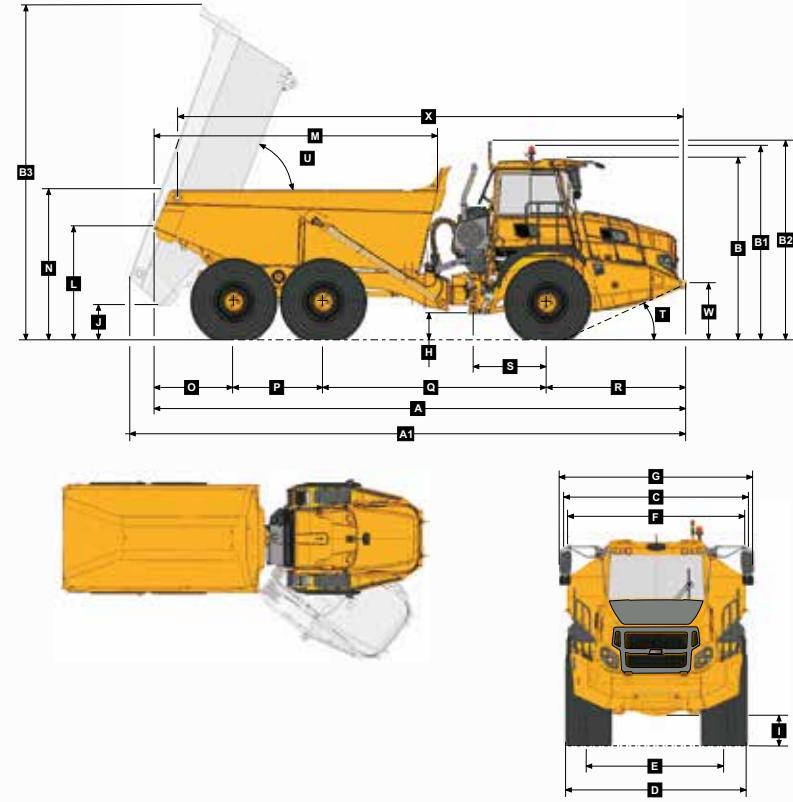

Machine Dimensions

| | | |
|----|---|--------------------------|
| A | Length - Transport Position | 9,953 mm (32 ft. 7 in.) |
| A1 | Length - Bin Fully Tipped | 10,311 mm (33 ft. 9 in.) |
| B | Height - Transport Position | 3,426 mm (11 ft. 2 in.) |
| B1 | Height - Rotating Beacon | 3,661 mm (12 ft.) |
| B2 | Height - Load Light | 3,747 mm (12 ft. 3 in.) |
| B3 | Bin Height - Fully Tipped | 6,255 mm (20 ft. 6 in.) |
| C | Width over Mudguards | 2,985 mm (9 ft. 9 in.) |
| D | Width over Tires - 23.5R25 | 2,940 mm (9 ft. 7 in.) |
| E | Tire Track Width - 23.5R25 | 2,356 mm (7 ft. 8 in.) |
| F | Width over Bin | 2,700 mm (8 ft. 10 in.) |
| F1 | Width over Tailgate | 2,998 mm (9 ft. 10 in.) |
| G | Width over Mirrors - Operating Position | 3,260 mm (10 ft. 8 in.) |
| H | Ground Clearance - Artic | 537 mm (21.14 in.) |
| I | Ground Clearance - Front Axle | 488 mm (19.21 in.) |
| J | Ground Clearance - Bin Fully Tipped | 670 mm (26.38 in.) |
| K | Ground Clearance - Under Run Bar | N/A |
| L | Bin Lip Height - Transport Position | 2,176 mm (7 ft. 1 in.) |
| M | Bin Length | 5,272 mm (17 ft. 3 in.) |
| N | Load over Height | 2,763 mm (9 ft.) |
| O | Rear Axle Centre to Bin Rear | 1,500 mm (4 ft. 11 in.) |
| P | Mid Axle Centre to Rear Axle Centre | 1,670 mm (5 ft. 5 in.) |
| Q | Mid Axle Centre to Front Axle Centre | 4,181 mm (13 ft. 8 in.) |
| R | Front Axle Centre to Machine Front | 2,602 mm (8 ft. 6 in.) |
| S | Front Axle Centre to Artic Centre | 1,362 mm (4 ft. 5 in.) |
| T | Approach Angle | 25° |
| U | Maximum Bin Tip Angle | 70° |
| V | Maximum Articulation Angle | 45° |
| W | Front Tie Down Height | 1,075 mm (3 ft. 6 in.) |
| X | Machine Lifting Centres | 9,477 mm (31 ft. 1 in.) |
| Y | Inner Turning Circle Radius - 23.5R25 | 4,110 mm (13 ft. 5 in.) |
| Z | Outer Turning Circle Radius - 23.5R25 | 8,000 mm (26 ft. 2 in.) |

Load Capacity & Ground Pressure

| OPERATING WEIGHTS | | GROUND PRESSURE | | LOAD CAPACITY | | OPTION WEIGHTS | |
|-------------------|-----------------|--------------------|-----------|---------------------|-----------|--------------------------------|---------------|
| UNLADEN | kg (lb) | LADEN (No sinkage) | kPa (Psi) | BODY | m³ (yd³) | | kg (lb) |
| Front | 10,085 (22,230) | 23.5 R 25 | | Struck Capacity | 12 (15.7) | Bin liner | 1,050 (2,314) |
| Middle | 4,805 (10,600) | Front | 246 (36) | LADEN (15% sinkage) | 230 (33) | SAE 2:1 Capacity | 15 (19.5) |
| Rear | 4,770 (10,520) | Middle | 337 (49) | Middle | 283 (41) | SAE 1:1 Capacity | 18 (23.5) |
| Total | 19,660 (43,350) | Rear | 337 (49) | Rear | 283 (41) | SAE 2:1 Capacity with Tailgate | 15.5 (20.3) |
| LADEN | | | | | | | |
| Front | 12,825 (28,274) | | | | | | |
| Middle | 15,435 (34,028) | | | | | | |
| Rear | 15,400 (33,951) | | | | | | |
| Total | 43,660 (96,253) | | | | | | |
| Rated Payload | | | | | | | |
| | | | | | | | |

Technical Data - B30E

ENGINE

Manufacturer Mercedes Benz

Model OM936LA

Configuration Inline 6, turbocharged and intercooled.

Gross Power 246 kW (329 hp) @ 2,200 rpm

Net Power 236 kW (316 hp) @ 2,200 rpm

Gross Torque 1,300 Nm (958 lbft) @ 1,150 -1,800 rpm

Displacement 7.7 liters (469 cu.in)

Auxiliary Brake Engine Valve Brake

Fuel Tank Capacity 302 liters (79.78 US gal)

AdBlue® Tank Capacity 31 l (8.2 US gal)

Certification OM936LA meets EU Stage IV / EPA Tier 4 Final emissions regulations.

TRANSMISSION

Manufacturer Allison

Model 3500PR ORS

Configuration Fully automatic planetary transmission with integral retarder.

Layout Engine mounted

Gear Layout Constant meshing planetary gears, clutch operated

Gears 6 Forward, 1 Reverse

Clutch Type Hydraulically operated multi-disc

Control Type

Electronic

Torque Control

Hydrodynamic with lock-up in all gears.

TRANSFER CASE

Manufacturer Bell VGR

Model 10000

Layout Remote mounted

Gear Layout Three in-line helical gears

Output Differential

Semi-independent, leading A-frame supported by hydro-pneumatic suspension struts.

AXLES

Manufacturer Bell

Model 18T

Differential High input limited slip differential with spiral bevel gears

TRANSMISSION

Final Drive Outboard heavy duty planetary on all axles.

BRAKING SYSTEM

Service Brake

Dual circuit, full hydraulic actuation wet disc brakes on front, middle and rear axles.

Maximum brake force: 233 kN (52,380 lbf)

Park & Emergency

Spring applied, air released driveline mounted disc.

Maximum brake force: 214 kN (48,200 lbf)

STEERING SYSTEM

Double acting cylinders, with ground-driven emergency steering pump.

Lock to lock turns

4.1

Steering Angle

45°

Auxiliary Brake

Automatic engine valve brake. Automatic, adjustable, integral, hydrodynamic transmission retarder. Output shaft speed dependent.

Total Retardation Power

Continuous: 318 kW (426 hp)
Maximum: 588 kW (788 hp)

WHEELS

Type Radial Earthmover

Tire 23.5 R 25 (750/65 R 25 optional)

FRONT SUSPENSION

Semi-independent, leading A-frame supported by hydro-pneumatic suspension struts.

REAR SUSPENSION

Pivoting walking beams with laminated rubber suspension blocks.

HYDRAULIC SYSTEM

Full load sensing system serving the prioritized steering, body tipping and brake functions. A ground-driven, load sensing emergency steering pump is integrated into the main system.

Pump Type

Variable displacement load sensing piston

Flow

165 l/min (44 gal/min)

Pressure

28 MPa (4,061 psi)

Filter

5 microns

CAB

ROPS/FOPS certified 74 dBA internal sound level measured according to ISO 6396.

DUMPING SYSTEM

Two double-acting, single stage, dump cylinders.

Raise Time

14.5 s

Lowering Time

7.5 s

Tipping Angle

70° standard, or any lower angle programmable

PNEUMATIC SYSTEM

Air drier with heater and integral unloader valve, serving park brake and auxiliary functions.

System Pressure

810 kPa (117 psi)

ELECTRICAL SYSTEM

Voltage 24 V

Battery Type

Two AGM (Absorption Glass Mat) type.

Battery Capacity

2 X 75 Ah

Alternator Rating

28V 80A

VEHICLE SPEEDS

| | | |
|-----|---------|--------|
| 1st | 7 km/h | 4 mph |
| 2nd | 15 km/h | 9 mph |
| 3rd | 23 km/h | 14 mph |
| 4th | 35 km/h | 22 mph |
| 5th | 47 km/h | 29 mph |
| 6th | 50 km/h | 31 mph |
| R | 7 km/h | 4 mph |

Flow 165 l/min (44 gal/min)


Pressure 28 MPa (4,061 psi)

Filter 5 microns

CAB

ROPS/FOPS certified 74 dBA internal sound level measured according to ISO 6396.

Dimensions

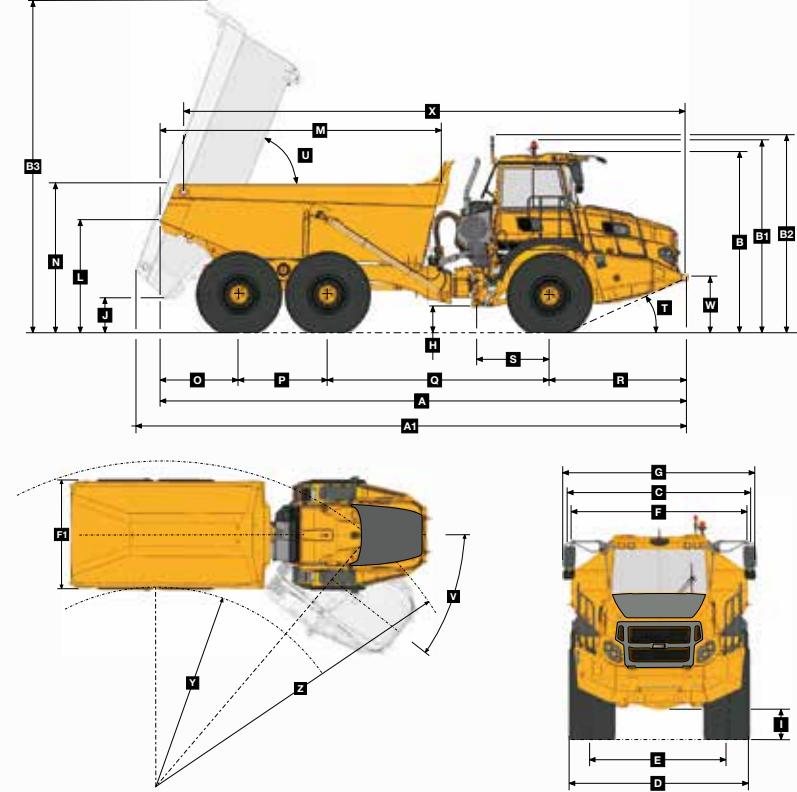

Machine Dimensions

| | | |
|----|--|--------------------------|
| A | Length - Transport Position | 9,953 mm (32 ft. 7 in.) |
| A1 | Length - Bin Fully Tipped | 10,395 mm (34 ft. 1 in.) |
| B | Height - Transport Position | 3,426 mm (11 ft. 2 in.) |
| B1 | Height - Rotating Beacon | 3,661 mm (12 ft.) |
| B2 | Height - Load Light | 3,747 mm (12 ft. 3 in.) |
| B3 | Bin Height - Fully Tipped | 6,307 mm (20 ft. 8 in.) |
| C | Width over Mudguards | 2,985 mm (9 ft. 9 in.) |
| D | Width over Tires - 23.5 R25 | 2,940 mm (9 ft. 7 in.) |
| D1 | Width over Tires - 750/65 R25 | 2,998 mm (9 ft. 10 in.) |
| E | Tire Track Width - 23.5 R25 | 2,356 mm (7 ft. 8 in.) |
| E1 | Tire Track Width - 750/65 R25 | 2,260 mm (7 ft. 4 in.) |
| F | Width over Bin | 2,968 mm (9 ft. 8 in.) |
| F1 | Width over Tailgate | 3,268 mm (10 ft. 8 in.) |
| G | Width over Mirrors - Operating Position | 3,260 mm (10 ft. 8 in.) |
| H | Ground Clearance - Artic | 537 mm (21.14 in.) |
| I | Ground Clearance - Front Axle | 488 mm (19.21 in.) |
| J | Ground Clearance - Bin Fully Tipped | 670 mm (26.38 in.) |
| K | Ground Clearance - Under Run Bar | N/A |
| L | Bin Lip Height - Transport Position | 2,176 mm (7 ft. 1 in.) |
| M | Bin Length | 5,294 mm (17 ft. 4 in.) |
| N | Load over Height | 2,864 mm (9 ft. 4 in.) |
| O | Rear Axle Centre to Bin Rear | 1,500 mm (4 ft. 11 in.) |
| P | Mid Axle Centre to Rear Axle Centre | 1,670 mm (5 ft. 5 in.) |
| Q | Mid Axle Centre to Front Axle Centre | 4,181 mm (13 ft. 8 in.) |
| R | Front Axle Centre to Machine Front | 2,602 mm (8 ft. 6 in.) |
| S | Front Axle Centre to Artic Centre | 1,362 mm (4 ft. 5 in.) |
| T | Approach Angle | 25° |
| U | Maximum Bin Tip Angle | 70° |
| V | Maximum Articulation Angle | 45° |
| W | Front Tie Down Height | 1,075 mm (3 ft. 6 in.) |
| X | Machine Lifting Centres | 9,443 mm (30 ft. 11 in.) |
| Y | Inner Turning Circle Radius - 23.5 R25 | 4,110 mm (13 ft. 5 in.) |
| Y1 | Inner Turning Circle Radius - 750/65 R25 | 4,081 mm (13 ft. 4 in.) |
| Z | Outer Turning Circle Radius - 23.5 R25 | 8,000 mm (26 ft. 2 in.) |
| Z1 | Outer Turning Circle Radius - 750/65 R25 | 8,029 mm (26 ft. 4 in.) |

Load Capacity & Ground Pressure

| OPERATING WEIGHTS | | GROUND PRESSURE | | LOAD CAPACITY | | OPTION WEIGHTS | |
|-------------------|-----------------|------------------------|------------------------|-----------------|-----------|------------------------|---------------|
| UNLADEN | kg (lb) | LADEN-No sinkage | LADEN-15% sinkage | BODY | m³ (yd³) | | kg (lb) |
| Front | 10,130 (22,330) | 23.5 R 25 kPa (Psi) | 23.5 R 25 kPa (Psi) | Struck Capacity | 14 (18.3) | Bin liner | 1,182 (2,606) |
| Middle | 5,025 (11,080) | Front | 282 (41) | Front | 246 (36) | SAE 2:1 Capacity | 17.5 (22.9) |
| Rear | 4,985 (10,990) | Middle | 380 (55) | Middle | 317 (46) | SAE 1:1 Capacity | 21 (27.5) |
| Total | 20,140 (44,400) | Rear | 380 (55) | Rear | 317 (46) | SAE 2:1 Capacity | |
| LADEN | | | | with Tailgate | 18 (23.5) | Extra wheelset (23. | |

Features and Options

Notes

| B25E | B30E | ● STANDARD | ▲ OPTION |
|--------------------------|------|--|----------|
| ENGINE | | | |
| ● ● | | Engine valve brake and exhaust brake | |
| ● ● | | Dual element air cleaner with dust ejector valve | |
| ● ● | | Precleaner with automatic dust scavenging | |
| ● ● | | Water separator | |
| ● ● | | Serpentine drive belt with automatic tensioner | |
| ● ● | | Provision for fast fill | |
| COOLING | | | |
| ● ● | | Crankshaft mounted electronically controlled viscous fan drive | |
| ● ● | | Fan guard | |
| PNEUMATIC SYSTEM | | | |
| ● ● | | Engine-mounted compressor | |
| ● ● | | Air drier with heater | |
| ● ● | | Integral unloader valve | |
| ELECTRICAL SYSTEM | | | |
| ● ● | | Battery disconnect | |
| ● ● | | Drive lights | |
| ● ● | | Air Horn | |
| ● ● | | Reverse alarm | |
| ● ● | | Rotating Beacon | |
| ● ● | | Pitch Roll Sensor | |
| ▲ ▲ | | Artic reverse light | |
| STEERING SYSTEM | | | |
| ● ● | | Bi-directional ground-driven secondary steering pump | |
| CAB | | | |
| ● ● | | ROPS/OPS certification | |
| ● ● | | Tilt cab | |
| ● ● | | Gas strut-supported door | |
| ● ● | | I-Tip programmable dump-body tip settings | |
| ● ● | | HVAC Climate control system | |
| ● ● | | AM/FM radio/CD player | |
| ● ● | | Rear window guard | |
| ● ● | | Wiper/washer with intermittent control | |
| ● ● | | Tilt and telescoping steering wheel | |
| ● ● | | Center-mount air-suspension seat | |
| ● ● | | Forward work lights | |
| ▲ ▲ | | LED work lights | |
| ▲ ▲ | | Rotating beacon: seat belt installation | |
| ▲ ▲ | | Remote engine and machine isolation | |
| ▲ ▲ | | Remote battery jump start | |
| ● ● | | Retractable 3 point seat belt | |
| ● ● | | Heated seat | |
| ● ● | | Foldaway trainer seat with retractable seat belt | |
| ● ● | | 12-volt power outlet | |
| ● ● | | Cab utility bin (removable) | |

| B25E | B30E | ● STANDARD | ▲ OPTION |
|------------------------|------|---|----------|
| CAB (continued) | | | |
| ● ● | | Cup holder | |
| ● ● | | Cooled/heated lunch box | |
| ● ● | | Electric adjustable and heated mirrors | |
| ● ● | | Deluxe 10" color LCD: Speedometer / Fuel gauge / Transmission oil temperature gauge / Engine coolant temperature gauge / LED function/warning indicators and audible alarm / Transmission gear selection / Tachometer / Battery voltage / Hour meter / Odometer / Fuel consumption / Tip counter / Trip timer / Trip distance / Metric/English units / Service codes/diagnostics | |
| ● ● | | Backlit sealed switch module functions with: Wiper control / Lights / Heated mirrors / Retarding aggressiveness / Transfer case differential lock / Transmission gear hold / Dump-body tip limit / Automatic dump-body tip settings / Air conditioner/ Heater controls / Preselected Speed Control | |
| DUMP BODY | | | |
| ● ● | | Dump body mechanical locks (x2). Partially up and fully up | |
| ▲ ▲ | | Body liner | |
| ▲ ▲ | | Tailgate | |
| ▲ ▲ | | Body heater | |
| ▲ ▲ | | Less dump body and cylinders | |
| OTHER | | | |
| ● ● | | Automatic Traction Control (ATC) | |
| ● ● | | Wet disc brakes B30E | |
| ● ● | | Dry disc brakes B25E | |
| ● ● | | 23.5R25 Radial Earthmover tires | |
| ▲ | | 750/65R25 Radial Earthmover tires | |
| ● ● | | Remote grease banks | |
| ● ● | | Automatic greasing | |
| ● ● | | Onboard Weighing | |
| ▲ ▲ | | Load lights: stack | |
| ▲ ▲ | | Comfort ride suspension (Front) | |
| ▲ ▲ | | Comfort ride suspension (Rear) | |
| ● ● | | Reverse camera | |
| ▲ ▲ | | Hand rails | |
| ● ● | | Cab peak | |
| ▲ ▲ | | High pressure hydraulic filter | |
| ▲ ▲ | | Fuel heater | |
| ● ● | | Belly cover | |
| ● ● | | Cross member cover | |
| ▲ ▲ | | Remote transmission filters | |
| ● ● | | Fleetm@tic® Classic Package for 5 years | |



All dimensions are shown in millimeters, unless otherwise stated between brackets.
Under our policy of continuous improvement, we reserve the right to change technical data
and design without prior notice. Photographs featured in this brochure may include optional
equipment. Blu@dvantage™ is a trademark of Bell Equipment Co. (PTY) Ltd
AdBlue® is a registered trademark of VDA

BELL INTERNATIONAL: Tel: +27 (0)35-907 9431
E-mail: marketing@bellequipment.com **Web:** www.bellequipment.com

Tel: +61 (0)8-9356-1033
 Tel: +49 (0)6631 / 91-13-0
 Tel: +27 (0)11-928-9700
 Tel: +44 (0)1283-712862

Tel: +33 (0)5-55-89-23-56
 Tel: +7-495-287-80-02
 Tel: +1-855-494-2355

**Strong Reliable Machines
Strong Reliable Support**

BELL