



# Technical Data - B45E

## ENGINE

**Manufacturer**  
Mercedes Benz (MTU)

**Model**  
OM471LA (MTU 6R 1300)

**Configuration**  
Inline 6, turbocharged and intercooled.

**Gross Power**  
390 kW (523 hp) @ 1,700 rpm

**Net Power**  
369 kW (495 hp) @ 1,700 rpm

**Gross Torque**  
2,460 Nm (1,814 lbf) @ 1,300 rpm

**Displacement**  
12.8 litres (781 cu.in)

**Auxiliary Brake**  
Engine Valve Brake

**Fuel Tank Capacity**  
352 litres (93 US gal)

**AdBlue® Tank Capacity**  
40 litres (11 US gal)

**Certification**  
OM471LA (MTU 6R 1300) meets EU Stage IV / EPA Tier 4 Final emissions regulations.

## TRANSMISSION

**Manufacturer**  
Allison

**Model**  
4700 ORS

**Configuration**  
Fully automatic planetary transmission.

**Layout**  
Engine mounted

**Gear Layout**  
Constant meshing planetary gears, clutch operated

**Gears**  
7 Forward, 1 Reverse

**Clutch Type**  
Hydraulically operated multi-disc

**Control Type**  
Electronic

**Torque Control**  
Hydrodynamic with lock-up in all gears.

## TRANSFER CASE

**Manufacturer**  
Bell VGR

**Model**  
18050

**Layout**  
Remote mounted

**Gear Layout**  
Three in-line helical gears

**Output Differential**  
Interaxle 33/67 proportional differential. Automatic inter-axle differential lock.

## AXLES

**Manufacturer**  
Bell

**Model**  
30T

**Differential**  
High input controlled traction differential with spiral bevel gears

**Final Drive**  
Outboard heavy duty planetary on all axles.

## BRAKING SYSTEM

**Service Brake**  
Dual circuit, full hydraulic actuation wet disc brakes on front and middle axles. Wet brake oil is circulated through a filtration and cooling system.

Maximum brake force:  
330 kN (74,187 lbf)

**Park & Emergency**  
Spring applied, air released driveline mounted disc.

Maximum brake force:  
218 kN (49,008 lbf)

**Auxiliary Brake**  
Automatic engine valve brake. Automatic retardation through electronic activation of wet brake system.

**Total Retardation Power**  
Continuous: 442 kW (593 hp)  
Maximum: 854 kW (1,145 hp)

## WHEELS

**Type**  
Radial Earthmover

**Tyre**  
29.5 R 25 (875/65 R 29 optional)

## FRONT SUSPENSION

Semi-independent, leading A-frame supported by hydro-pneumatic suspension struts.

Option: Electronically controlled adaptive suspension with ride height adjustment.

## REAR SUSPENSION

Pivoting walking beams with laminated rubber suspension blocks.

Option: Comfort Ride suspension walking beams, with two-stage sandwich block.

## HYDRAULIC SYSTEM

Full load sensing system serving the prioritized steering, body tipping and brake functions. A ground-driven, load sensing emergency steering pump is integrated into the main system.

**Pump Type**  
Variable displacement load sensing piston

**Flow**  
330 L/min (87 gal/min)

**Pressure**  
315 bar (4,569 psi)

**Filter**  
5 microns

## STEERING SYSTEM

Double acting cylinders, with ground-driven emergency steering pump.

**Lock to lock turns**  
5

**Steering Angle**  
42°

## DUMPING SYSTEM

Two double-acting, single stage, dump cylinders.

**Raise Time**  
11 seconds

**Lowering Time**  
6 seconds

**Tipping Angle**  
70 deg standard, or any lower angle programmable

## PNEUMATIC SYSTEM

Air drier with heater and integral unloader valve, serving park brake and auxiliary functions.

**System Pressure**  
810 kPa (117 psi)

## ELECTRICAL SYSTEM

**Voltage**  
24 V

**Battery Type**  
Two AGM (Absorption Glass Mat) type.

**Battery Capacity**  
2 X 75 Ah

**Alternator Rating**  
28V 80A

## MAX. VEHICLE SPEED

1st	4 km/h	2.5 mph
2nd	9 km/h	6 mph
3rd	17 km/h	11 mph
4th	23 km/h	14 mph
5th	33 km/h	21 mph
6th	44 km/h	27.3 mph
7th	51 km/h	32 mph
R	7 km/h	4 mph

## CAB


ROPS/FOPS certified 74 dBA internal sound level measured according to ISO 6396.

# Load Capacity & Ground Pressure

OPERATING WEIGHTS		GROUND PRESSURE*		LOAD CAPACITY		OPTION WEIGHTS	
UNLADEN	kg (lb)	LADEN		BODY	m <sup>3</sup> (yd <sup>3</sup> )	kg (lb)	
Front	16,984 (37,443)	(No sinkage/Total Contact Area Method)		Struck Capacity	19.5 (25.5)	Bin liner	1,404 (3,095)
Middle	7,778 (17,148)	29.5 R 25	kPa (Psi)	SAE 2:1 Capacity	25 (33)	Tailgate	1,013 (2,233)
Rear	7,564 (16,676)	Front	321 (47)	SAE 1:1 Capacity	29.5 (38)	875/65 R29	
Total	32,326 (71,267)	Mid & Rear	370 (54)	SAE 2:1 Capacity with Tailgate	26 (34)	(per vehicle) Add	1,182 (2,606)
<b>LADEN</b>						<b>EXTRA WHEELSET</b>	
Front	22,109 (48,742)	875/65 R29	kPa (Psi)	Rated Payload	41,000 kg	29.5 R 25	800 (1,764)
Middle	25,715 (56,692)	Front	294 (43)		(90,390 lb)	875/65 R29	1,024 (2,258)
Rear	25,502 (56,222)	Mid & Rear	331 (48)				
Total	73,326 (161,656)						

\* 29.5R25 Groundpressures calculated with Michelin XADN+ Tyre. 875/65R29 Groundpressures calculated with Michelin XAD65-1 Tyre.

## Dimensions

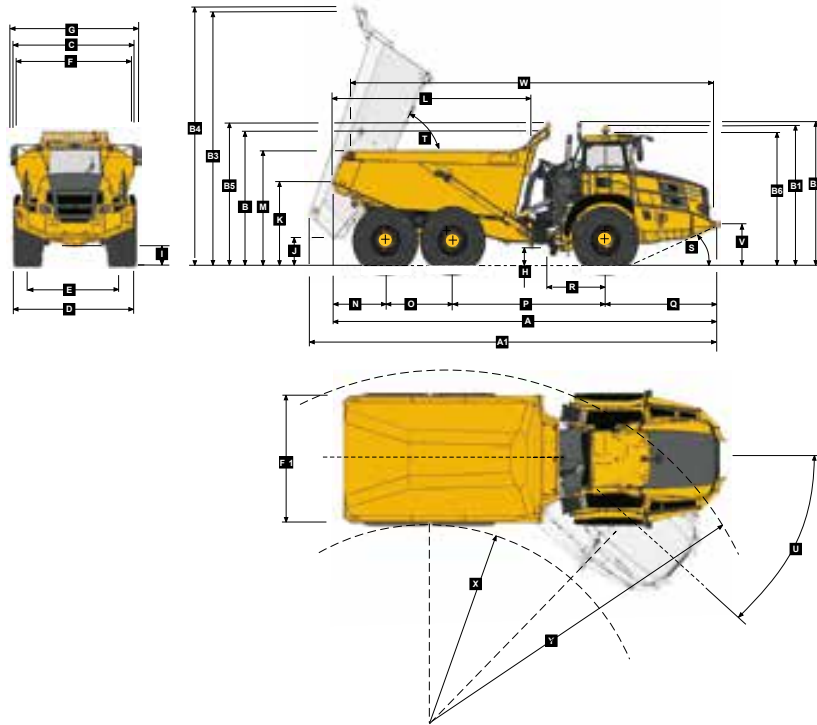


### Machine Dimensions

A	Length - Transport Position with Tailgate	11184 mm (36 ft. 8 in.)
A	Length - Transport Position w/o Tailgate	11184 mm (36 ft. 8 in.)
A1	Length - Bin Fully Tipped	11778 mm (38 ft. 8 in.)
B	Height - Transport Position w/o Rock Guard	3802 mm (12 ft. 6 in.)
B	Height - Transport Position with Rock Guard	3844 mm (12 ft. 7 in.)
B1	Height - Rotating Beacon	4038 mm (13 ft. 3 in.)
B2	Height - Load Light	4127 mm (13 ft. 6 in.)
B3	Bin Height - Fully Tipped w/o Rock Guard	7340 mm (24 ft. 1 in.)
B4	Bin Height - Fully Tipped with Rock Guard	7448 mm (24 ft. 5 in.)
B5	Height - Rock Guard Operating Position	4123 mm (13 ft. 6 in.)
B6	Height - Cab	3802 mm (12 ft. 6 in.)
C	Width over Mudguards	3495 mm (11 ft. 6 in.)
D	Width over Tyres - 875/65 R29	3656 mm (11 ft. 12 in.)
D	Width over Tyres - 29.5R25	3487 mm (11 ft. 5 in.)
E	Tyre Track Width - 875/65 R29	2773 mm (9 ft. 1 in.)
E	Tyre Track Width - 29.5R25	2725 mm (8 ft. 11 in.)
F	Width over Bin	3448 mm (11 ft. 4 in.)
F1	Width over Tailgate	3738 mm (12 ft. 3 in.)
G	Width over Mirrors - Operating Position	4027 mm (13 ft. 3 in.)
H	Ground Clearance - Artic	545 mm (21.46 in.)
I	Ground Clearance - Front Axle	543 mm (21.34 in.)
J	Ground Clearance - Bin Fully Tipped	880 mm (34.65 in.)
K	Bin Lip Height - Transport Position	2521 mm (8 ft. 3 in.)
L	Bin Length	5753 mm (18 ft. 10 in.)
M	Load over Height	3316 mm (10 ft. 11 in.)
N	Rear Axle Centre to Bin Rear	1540 mm (5 ft.)
O	Mid Axle Centre to Rear Axle Centre	1950 mm (6 ft. 5 in.)
P	Mid Axle Centre to Front Axle Centre	4438 mm (14 ft. 7 in.)
Q	Front Axle Centre to Machine Front	3256 mm (10 ft. 8 in.)
R	Front Axle Centre to Artic Centre	1558 mm (5 ft. 1 in.)
S	Approach Angle	24°
T	Maximum Bin Tip Angle	70°
U	Maximum Articulation Angle	42°
V	Front Tie Down Height	1262 mm (4 ft. 2 in.)
W	Machine Lifting Centres	10569 mm (34 ft. 8 in.)
X	Inner Turning Circle Radius - 875/65R29	4782 mm (15 ft. 8 in.)
X	Inner Turning Circle Radius - 29.5R25	4866 mm (15 ft. 12 in.)
Y	Outer Turning Circle Radius - 875/65R29	9320 mm (30 ft. 7 in.)
Y	Outer Turning Circle Radius - 29.5R25	9235 mm (30 ft. 4 in.)

## Grade Ability/Rimpull

- Determine tractive resistance by finding intersection of vehicle mass line and grade line.  
NOTE: 2% typical rolling resistance is already assumed in chart and grade line.
- From this intersection, move straight right across charts until line intersects rimpull curve.
- Read down from this point to determine maximum speed attained at that tractive resistance.

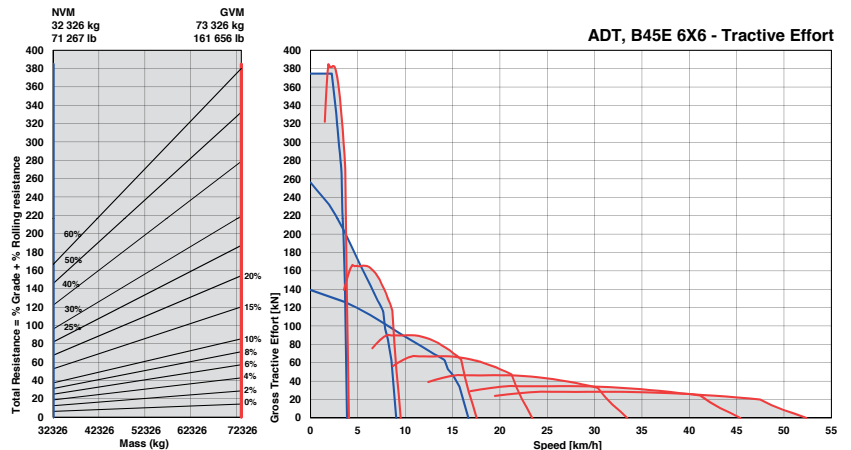

## Retardation

- Determine retardation force required by finding intersection of vehicle mass line.
- From this intersection, move straight right across charts until line intersects the curve.  
NOTE: 2% typical rolling resistance is already assumed in chart.
- Read down from this point to determine maximum speed.

